

DECLARATION OF PERFORMANCE

NO: 140622002

| | |
|--|---|
| 1. Unique identification code of the product- type | SOMAFIX PU MASONRY&GAS CONCRETE ADHESIVE 2 in 1 |
| 2. Intended use or uses of the construction product | SOMAFIX MASONRY&GAS CONCRETE ADHESIVE 2 in 1 has been developed specifically as a replacement to traditional mortar for bonding a variety of any solid and hollow brick, block, granite and marble, roofing tile, natural stone, rock and other masonry products. Its valve system allows to work with gun and straw whenever needed. |
| 3. Identification of the product | See batch number on the product |
| 4. In accordance with the applicable harmonised technical specification | FEICA TM1014 : Skin Forming Time FEICA TM1015: Curing Time Visual Test : Colour |
| 5. Name and contact address of the manufacturer as required pursuant to | SOMA KİMYA SANAYİ VE TIC. A.Ş. Hadımköy Mah. Alpaslan Sok. No:10 Arnavutköy, İSTANBUL |
| 6. The notified body | Test are done at : SOMA KİMYA SANAYİ VE TIC. A.Ş. Hadımköy Mah. Alpaslan Sok. No:10 Arnavutköy, İSTANBUL Test Report: TDS.09.70 |

7. Declared Performance

| | |
|-------------------|--------------|
| Colour | LIGHT YELLOW |
| Skin Forming Time | 8 – 10 min. |
| Curing Time | 15 – 20 min. |

The performance of this product is in conformity with the declared performance. This declaration of performance is issued under the sole responsibility of the manufacturer.

Signed for on behalf of the manufacturer by:

Istanbul, 14.06.2022

SOMA KİMYA
SANAYİ VE TİCARET A.Ş.
Hadımköy Mah. Alpaslan Sok. No: 10 Arnavutköy-İSTANBUL
Tic. Sic. No: 271155/3 hat Fax: 0212 771 39 54
Tic. Sic. No: 271155/3 hat Fax: 0212 771 39 54



SOMA KİMYA
SANAYİ ve TİCARET A.Ş.




CERTIFICATE OF ANALYSIS

Product: SOMAFIX PU MASONRY&GAS CONCRETE ADHESIVE 2 in 1

We certify that the following product has these values (@23 °C 50 % RH):

| Test | Test Method | Unit | Value |
|-------------------|--------------|------|--------------|
| Colour | Visual Test | - | LIGHT YELLOW |
| Skin Forming Time | FEICA TM1014 | min. | 8 - 10 |
| Curing Time | FEICA TM1015 | min. | 15 - 20 |

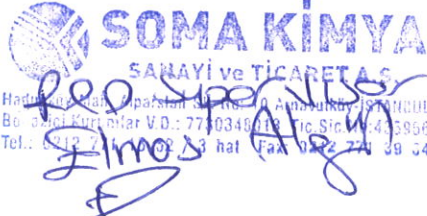

SOMA KİMYA SAN ve TIC. A.Ş
Quality Control